



Benchmarking: An International Journal

A review of techniques for risk management in projects

Ammar Ahmed, Berman Kayis, Sataporn Amornsawadwatana,

Article information:

To cite this document:

Ammar Ahmed, Berman Kayis, Sataporn Amornsawadwatana, (2007) "A review of techniques for risk management in projects", *Benchmarking: An International Journal*, Vol. 14 Issue: 1, pp.22-36, <https://doi.org/10.1108/14635770710730919>

Permanent link to this document:

<https://doi.org/10.1108/14635770710730919>

Downloaded on: 25 April 2018, At: 15:29 (PT)

References: this document contains references to 61 other documents.

To copy this document: permissions@emeraldinsight.com

The fulltext of this document has been downloaded 15353 times since 2007*

Users who downloaded this article also downloaded:

(2009), "Risk management applied to projects, programs, and portfolios", *International Journal of Managing Projects in Business*, Vol. 2 Iss 1 pp. 14-35 https://doi.org/10.1108/17538370910930491

(2008), "Risk management in a multi-project environment: An approach to manage portfolio risks", *International Journal of Quality & Reliability Management*, Vol. 25 Iss 1 pp. 60-71 https://doi.org/10.1108/02656710810843586

Access to this document was granted through an Emerald subscription provided by emerald-srm:186072 []

For Authors

If you would like to write for this, or any other Emerald publication, then please use our Emerald for Authors service information about how to choose which publication to write for and submission guidelines are available for all. Please visit www.emeraldinsight.com/authors for more information.

About Emerald www.emeraldinsight.com

Emerald is a global publisher linking research and practice to the benefit of society. The company manages a portfolio of more than 290 journals and over 2,350 books and book series volumes, as well as providing an extensive range of online products and additional customer resources and services.

Emerald is both COUNTER 4 and TRANSFER compliant. The organization is a partner of the Committee on Publication Ethics (COPE) and also works with Portico and the LOCKSS initiative for digital archive preservation.

*Related content and download information correct at time of download.



A review of techniques for risk management in projects

Ammar Ahmed, Berman Kayis and Sataporn Amornsawadwatana

*School of Mechanical and Manufacturing Engineering,
The University of New South Wales, Sydney, Australia*

Abstract

Purpose – This paper aims to provide a review of techniques that support risk management in product development projects using the concurrent engineering (CE) philosophy.

Design/methodology/approach – The Australia/New Zealand risk management standard AS/NZS 4360:1999 proposes a generic framework for risk management. This standard was adapted for product development projects in the CE environment. In this paper, existing techniques were reviewed for their applicability to processes in risk management; namely, techniques for establishing context, risk identification, risk assessment and treatment.

Findings – Risk management is an activity within project management that is gaining importance due to current business environment with a global focus and competition. The techniques reviewed in this paper are used on an *ad hoc* basis currently. A more risk focused approach is likely to result in an integration of several of these techniques, resulting in an increased effectiveness of project management.

Practical implications – The techniques reviewed in this paper can be used for the development of risk management tools for engineering and product development projects.

Originality/value – This paper provides a gist of techniques categorized in the form that they are applicable for implementation of risk management functions in product development projects using CE philosophy.

Keywords Risk management, Project management, Product development, Risk assessment

Paper type General review

Introduction

Projects are managed through the concurrent engineering (CE) philosophy for faster time to market and to achieve project objectives through a shorter iterative process. CE is the development of product and process through simultaneous functions that aims at reducing time to market, overall development cost and achieve a high product quality (Salamone, 1995; Caillaud *et al.*, 1999). Owing to the multi-functional nature of teams in CE, product and process information is shared and a quick overall understanding of the product and process is developed. This leads to an achievement of the right design in the first attempt and helps attaining a clarity for the issues in the implementation phase of the project, resulting in an overall lower developmental cost and a quicker response to market as compared to a traditional over the wall approach (Jo *et al.*, 1993).

The design process determines product geometry, materials, functional specifications, machining processes, assembly sequences, tools and equipment necessary to manufacture a product. Production plans, control tools such as inventory controls, resource allocations and job scheduling are other important outputs of the design process. Hence, it can be asserted that design influences to a great extent, the quality and the cost of the product (Salamone, 1995; Jo *et al.*, 1993). Short comings in the product design process results in extra costs generated through project delays, penalties, excess of materials used, labour, additional operations, resource

reallocations, rescheduling and rework. Hence, risk management in product design is beneficial and should complement project management activities, especially in a CE environment. This paper describes a framework for the risk management process, as proposed by the Australian Risk Management Standard (Risk Management Standard AS/NZS 4360, 1999) and reviews the techniques that can be used for each process within risk management so that a framework can be evolved for designing tools for risk management.

The risk management process

In general, unexpected events occur in projects and may result in either positive or negative outcomes that are a deviation from the project plan. Positive outcomes are opportunities while negative outcomes generate a loss. Risk focuses on the avoidance of loss from unexpected events (Williams, 1995). Several definitions of risk are available in the literature and risk is usually referred to as an exposure to losses in a project (Webb, 1994; Chapman and Ward, 1997) or as a probability of losses in a project (Risk Management Standard AS/NZS 4360, 1999; Larson and Kusiak, 1996a; Remenyi and Heafield, 1996; Jaafari, 2001; Kartam and Kartam, 2001). In this paper, the later definition of risk has been used because this definition implies that risk is quantifiable and lends itself to assessment and analysis through computational methods. A situation where it is not possible to attach a probability of occurrence to an event is defined as uncertainty (Clemen, 1996; Taha, 1997). While uncertainty is not measurable, it can be estimated through subjective assessment techniques (Raftery, 1994).

The risk management process refers to uncovering weaknesses in methods used in product development through a structured approach so that timely mitigation actions are initiated to avoid risk, transfer risk, reduce risk likelihood or reduce risk impact (Risk Management Standard AS/NZS 4360, 1999). The risk management process proposed by the Australian Standard for Risk Management is shown in Figure 1. It is composed of seven iterative sub-processes of establishing the context of risk, identifying risks, analysing risks, evaluating risks, communication and consultation across stakeholders and monitoring and controlling risk events. The risk management process blends itself to CE product design and development, as changes and iterations in the design stage cost less than changes initiated in the implementation phase (Salamone, 1995; Jo *et al.*, 1993). Hence, early discovery of risk events leading to downstream losses is much more preferable than treating losses when they cannot be prevented.

Techniques for context establishment

Context establishment in the risk management process involves representation of project units (functional, process, data, etc.) and their inter-relationships (Ahmed *et al.*, 2003a, b). This enables in representing project status in several forms such as resource usage, equipment requirements, budget availability, stakeholder involvement, contract deliverables, strategic goals and schedule, depending on the desirable aspect of the project that is important for any particular purpose.

Project modelling tools and techniques are in general, are also the techniques for context establishment for risk management. These are project network diagram, precedence diagramming method (PDM), generalized activity networks (GANs), design structure matrices (DSM), IDEF3 process modelling and IDEF0 functional modelling. These are described in detail in the following paragraphs.

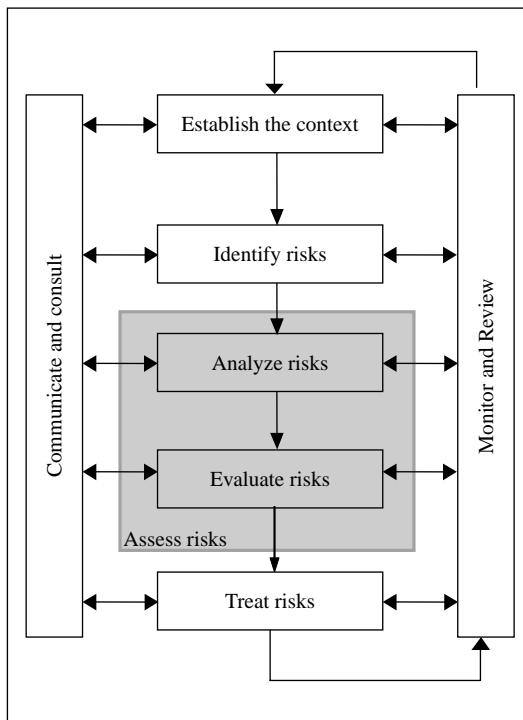


Figure 1.
Representation of the risk management process as per AS/NZS 4360:1999

Project network diagrams

Project network diagramming is a graphical technique used for representing project tasks and precedence relationships (Webb, 1994; Russell and Taylor, 2000; Tavares, 2002). Project tasks or activities are modelled as arrows or nodes through two different methods – activity on node or activity on arrow. A project network diagram provides a simple visual display of tasks in a project, with difficulty in representing complex relationships. Alternative and overlapped activities are also not accommodated in project network diagrams. Critical path method (CPM) and program evaluation and review technique (PERT) are then used for analysis of critical path for the project, identification of critical tasks and estimation of the total project duration. A combination of project network diagramming, CPM and PERT techniques lend themselves into simple schedule focused management of projects (Larson and Kusiak, 1996a).

Precedence diagramming method

PDM is an extension of the project network diagramming technique where overlapped content between two dependent activities can be represented through lead-lag requirement relationships (Wiest, 1981; Badiru, 1993; Badiru, 1996). Lead-lag relationships usually depict that there is overlapping time duration between the completion time of an activity and the starting time of the subsequent activity. Lead-lag relationships are divided into four types:

- (1) start-to-start;
- (2) finish-to-finish;
- (3) start-to-finish; and
- (4) finish-to-start.

The overlapping of activities means that the estimation of project duration is usually compressed and results in a shorter completion time when compared to PERT. However, manual computations are tedious, especially for large networks (Badiru, 1996).

Generalized activity networks

A GAN is a graphical representation of the probabilistic branching of activities (Dawson and Dawson, 1994, 1995, 1998). Uncertainty is represented as alternative paths with a probability attached to it, providing an illustration of all possible paths or scenarios that can be described for a project, including loops. GAN also becomes very complicated when the number of nodes increase, with an added difficulty of quantification of branching probabilities as an output from every activity node.

Design structure matrices

A design structure matrix (DSM) represents precedence relationships of project tasks on a square matrix containing equal number of rows and columns representing the number of tasks (Steward, 1981; Kara *et al.*, 1999; Eppinger *et al.*, 2001). Existence of a precedence relationship between two tasks is represented through a binary code, with a mark "X". Absence of the mark means that no precedence relationship exists between the two tasks. DSM depicts three different types of precedence relationships between tasks. A sequential relation indicates that the precedent task must be completed before the subsequent task commences. A parallel relationship indicates that two tasks are carried out independently, while a coupled or a circuit relationship indicates that the two tasks are interdependent, requiring input from each other (Steward, 1981; Kara *et al.*, 1999; Eppinger *et al.*, 2001). DSM provides a capability of representing task relationships in a complex system and lends itself to analysis through matrix manipulations leading to the isolation of group of coupled tasks. However, decision points are not represented into the DSM structure and alternative paths are not realized.

IDEFO functional modelling

IDEFO is a graphical representation of a system through a functional perspective (Colquhoun *et al.*, 1993; Sarkis and Lin, 1994; Malmstrom *et al.*, 1999). In IDEF0, a box represents an activity or a function while arrows represent inputs, outputs, controls and mechanisms operating on activities and on the project as a whole (Colquhoun *et al.*, 1993; Sarkis and Lin, 1994; Malmstrom *et al.*, 1999; Ang and Gay, 1993; Kusiak *et al.*, 1994). An input is a requirement that a functional unit needs to perform, while an output is the outcome of that function or a combination of functions. Controls are constraints that dictate functions such as regulatory environment and budget, while mechanisms are supports that advocate performance of that function such as people, computer systems and machines. IDEF0 provides an overall view of the project at the top level and successively more details deeper into subsequent levels. This provides a model that is relevant to all functional levels in the organization.

IDEF3 process modelling

IDEF3 is a graphical method used for modelling sequence of tasks in a system through process or object-oriented perspectives. Process-centered view emphasizes process flow and relationships between tasks, while object-centered view highlights change in states of objects as a process flows (Larson and Kusiak, 1996a, b; Mayer *et al.*, 1995). In a system, tasks are defined as units of behaviour (UOB); relationships are represented as links and logical branching as junctions. Logical branches or junctions are usually decision points in the system and they could be of – AND, OR, or EXCLUSIVE OR types. An AND junction means that all UOB connecting this junction must be performed, an OR junction means that at least one UOB connecting this junction needs to be performed while, an EXCLUSIVE OR junction indicates that only one UOB connecting this junction can be performed. Fan-in and fan-out junctions indicate multiple paths in the process flow with fan-in junctions indicating convergent paths, while fan-out junctions indicate divergent paths in the process flow.

IDEF3 allows greater flexibility in modelling alternatives in design processes and is suited for the CE environment and lends itself as a foundation for further risk analysis (Kusiak and Zakarian, 1996). Since, processes can be represented in layers with the top layer providing the overall view, an IDEF3 model could be as simple as it is desired to be or dig down into details in each subsequent lower layers.

Techniques for risk identification

Risk identification is studying a situation to realize what could go wrong in the product design and development project at any given point of time during the project. Sources of risk and potential consequences need to be identified, before they can be acted upon to mitigate. Experts in their own domain have intuitive methods of recognizing a risk situation. As such, the identification tools presented in this section are more general in nature and need a collaborative approach so that all aspects of the project are examined for risk situations.

Checklists

Checklists are a trivial method of risk identification where pre-determined crucial points are examined for symptoms of potential risk situation (Webb, 1994; Duncan, 1996; Kumamoto and Henley, 1996; Cross, 2001). These are simple to use and usually evolve over time through contributions from various functional experts and collective experiences (Chapman and Ward, 1997; Ward, 1999).

Influence diagrams

An influence diagram is graphical representation of the structure of the decision context such that decisions, uncertain events, consequences and their interrelationships are graphically enumerated (Clemen, 1996; Clemen and Reilly, 2001). Owing to the visual display, cause-and-effects of risk situations are described and can be used for identifying risk situations before they eventuate.

Cause-and-effect diagrams

A cause-and-effect diagram or a fish bone diagram is a graphical representation of root causes of quality problems, where major causes of the ultimate problem are grouped and broken down into detailed sources (Russell and Taylor, 2000). Though, cause-and-effect

diagrams are easy to use, they do not provide a foundation for further analysis such as relative importance of individual causes of a problem. Hence, cause-and-effect diagrams are used for deterministic problems in a very specific domain.

Failure mode and effect analysis

Failure mode and effect analysis (FMEA) provides a structure for determining causes, effects and relationships in a technical system. FMEA is used to determine failures and malfunctions through exploration of failure modes, consequences of a system component failure so that solutions for rectifying these problems can be visualized (Risk Management Standard AS/NZS 4360, 1999; Kumamoto and Henley, 1996; Cross, 2001).

Hazard and operability study

Hazard and operability study (HAZOP) is an extension of FMEA where check words are applied to process parameters in order to identify safety and operational problems, usually in new systems (Cross, 2001; Lawley, 1974; Roach and Lees, 1981; Kletz, 1985). Check words create other perspectives to the overall process and focus attention on unforeseen areas in the process. In risk management for projects, HAZOP can be applied by considering project parameters such as strategy, budget and schedule to identify risk situations.

Fault trees

Fault tree analysis is a visual technique for breaking down failure in the system into source events (Kumamoto and Henley, 1996; Cross, 2001; Kletz, 1985; Dhillon, 1982; Birolini, 1993). Fault trees use event and gate symbols to structure cause and effect relationships of a failure. It is a simple technique and helps in reflecting on logical sequences that lead to failure. In project risk analysis, this technique is complicated due to the large number of events and gates; however, it could be used in a smaller domain to analyse a particular failure.

Event tree

Event tree analysis is a graphical representation of potential consequences arising from a failure where possible consequences are generated and broken down from an initial event (Kumamoto and Henley, 1996; Cross, 2001). In project risk analysis its application is similar to fault tree analysis and works only on small zone of influence of potentially damaging consequence arising from a risk event.

Techniques for risk analysis

After risk events are identified, their characteristics need to be assessed so that it is determined whether the risk event is worth further analysis. Once it is decided that a risk event needs analysis then it needs to be determined whether the risk event information can be acquired through quantitative or qualitative means. Measurement metrics for risk also need to be determined so that these metrics can be used for computation of risk magnitude and risk analysis leading to risk mitigation plans (Amornsawadwatana *et al.*, 2002).

Risk is measured using two parameters – risk probability and risk consequence (Risk Management Standard AS/NZS 4360, 1999; Chapman and Ward, 1997;

Ward, 1999; Boehm and DeMarco, 1997; Conroy and Soltan, 1998; Duncan, 1996; Baccarini and Archer, 2001; Patterson and Neailey, 2002; Pyra and Trask, 2002). Risk probability or likelihood indicates a chance of a risk event occurring while risk consequence, severity or impact represents an outcome generated from the risk event. Risk magnitude is the product of risk probability and consequence. To measure risk magnitude, probability and consequence of a risk event needs to be determined, which constitute the risk assessment function.

In practice, the risk quantities are either quantitative or qualitative in nature. The quantitative approach to determination of risk parameters requires analysis of historical data through statistical analysis. In many instances, quantitative data is hard to achieve and is restricted to very small domain of the problem where historical trends could be sustained. An example of quantitative data for determining risk consequence is a historical record of money spent on correcting non-compliance of tooling usually used in fabrication of the type product being currently developed. Though, the risk may not eventuate, there is a fair estimate of the cost of the risk actually eventuating. Quantitative data is not always available when needed or not in the form required, hence a qualitative approach using subjective assessment techniques are often more appropriate for risk management. The subjective approach utilizes mainly the relative measures of human judgments, feelings and opinions in comparison to ideal situations. Though the subjective approach is influenced by individual bias, preferences and expertise, it provides a basis for risk assessment where it is more important to highlight risk events that are possible, rather than an exact prediction of a catastrophic event. An example of qualitative assessment is that the impact of the non-conformance of a fabrication tool to be used in the project is very high, but the chance of such an eventuality is very low. Though, the terms very high and very low can be represented on a nominal scale, it is not an exact measure. Organisations employ qualitative assessment techniques to identify risk because an expert opinion is the best source available, rather than an unreliable quantity.

Techniques for risk analysis

The function of risk analysis is to determine influence of risk factors on the system as a whole. Risk events form a cumulative effect on one or more aspects of the project and it is easier to mitigate risk events if they can be bunched in groups and preferably dealt at a higher level in the long run than focusing on one particular risk event, in which case the project is likely to be micro-managed. Several techniques in the literature that are currently applied for project analysis can also be applied for risk analysis. These are summarized in this section.

Probability and impact grids

Risk events represented on a grid consisting of probability on one axis and impacts on another are often used to define threshold regions on the grid, which represent high risk events based on past experience or organizational procedures (Risk Management Standard AS/NZS 4360, 1999; Chapman and Ward, 1997; Ward, 1999; Pyra and Trask, 2002; Stewart and Melchers, 1997; Royer, 2000). Probability and impact grids provide a simple format for showing relative importance of risk events. Figure 2 shows an example of a probability and impact grid (Royer, 2000).

Estimation of system reliability

System reliability estimation is technique of determining chance of a system element such that it is functioning without a failure in a specified time period (Dhillon, 1982; Birolini, 1993; Henley and Kumamoto, 1991). System elements are integrated together as having either a serial or a parallel relationship and traditional reliability calculations are then used to determine the overall reliability of the system, representing its health. Hence, cumulative effects on the critical components of the project are determined as the system reliability.

Fault tree analysis

Fault tree analysis determines the chance or a failure event occurring in the project structure represented in a fault tree (Cross, 2001; Dhillon, 1982; Stewart and Melchers, 1997). Further, the top-level chance or a failure is determined from events in lower levels passing through logical gates. This analysis provides an overview of risk in the overall project through top-level analysis or specific components of the project through analysis at lower levels.

Event tree analysis

Event tree analysis determines how likely a particular event represented on an event tree is likely to happen from an initial event (Cross, 2001; Stewart and Melchers, 1997). The probability of occurrence of a particular outcome is determined as a product of all probabilities of occurrence in the associated branch. Owing to this examination of all failures that are possible for an outcome, event tree analysis leads to a comprehensive mitigation plan.

Sensitivity analysis and simulation

Sensitivity analysis is a what-if type of analysis to reflect on responses by the system as project conditions change (Clemen, 1996; Clemen and Reilly, 2001; Perry, 1986). A baseline for the project metrics is generated as a precursor to a what-if analysis and then project conditions are manipulated to determine their effect on the project metrics. This leads to an understanding of the system response to changing project situations.

Simulation is used as an extension to the sensitivity analysis (Benny and Townsend, 1993). In simulation, a system model is constructed to reflect actual processes with project parameters and constraints. Then, the values for the risk parameters and constraints are randomly selected in a predefined range (Ahmed *et al.*, 2003a, b). A collation of the effects are tabulated and statistically analysed to provide an insight into the system behaviour under various conditions (Duncan, 1996). Simulation is a flexible technique for risk analysis, but requires large simulation runs to provide sufficient data for statistical analysis.

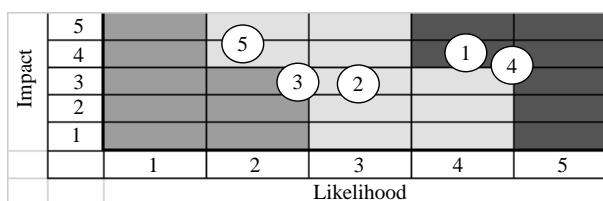


Figure 2.
Probability and
impact grid

Techniques for risk evaluation

Risk evaluation is the function of risk management where risk events need to be prioritised so that risk mitigation plans are determined either based on past experience, lessons learnt, best practices, organizational knowledge, industry benchmarks and standard practices (Ahmed *et al.*, 2003a, b). In risk evaluation, different aspects of the project – strategic, budget or schedule may be considered in light of a risk event to determine risk mitigation options and incorporate the most suitable option into a mitigation plan. This section describes several evaluation techniques that can be applied for risk evaluation.

Decision tree analysis

Decision tree analysis is used to structure a decision process and evaluate outcomes from uncertain events (Webb, 1994; Clemen, 1996; Taha, 1997; Russell and Taylor, 2000; Duncan, 1996; Clemen and Reilly, 2001; Perry and Haynes, 1985). In decision trees, decision nodes and chance nodes are represented graphically and expected monetary values (EMV) are attached to the nodes. EMV is then used to calculate expected returns from decisions and select the decisions that generate the maximum returns (Clemen, 1996; Russell and Taylor, 2000; Clemen and Reilly, 2001; Perry and Haynes, 1985). Figure 3 shows decision tree analysis for an investment. Decision tree analysis incorporates probability of returns associated with decisions and estimation of expected returns, which could be misleading in situations that are out of the normal. As such decision tree analysis should be used with caution for risk analysis.

Portfolio management

Portfolio management compares multiple projects with respect to risk in investment and returns (DeMaio *et al.*, 1994; Clarke and Varma, 1999; Dickinson *et al.*, 2001). Projects are positioned on a matrix of risk magnitude and return, with high risk low return projects being located at a different location to low risk and high return projects. This enables decisions to be derived for corporate governance, based on the company strategy and the maximum portfolio value, through calculation of a utility value for a project (DeMaio *et al.*, 1994). In project risk management, multiple risk events may be compared by placing them on a matrix of risk magnitude against a return. Mitigation options are then derived from predefined utility values.

Multiple criteria decision-making method

Multiple criteria decision-making method considers different project attributes including the negative and the positive factors of a decision (Webb, 1994; Remenyi and

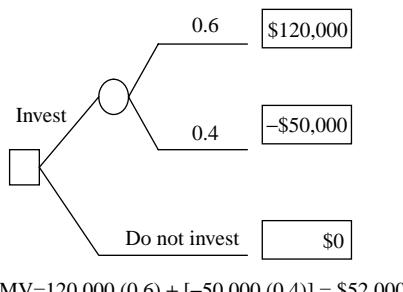


Figure 3.
Decision tree analysis

Haefield, 1996). Project attributes are weighted according to project predominance of the predefined criteria. The product of the relative weight and the score for an attribute gives a weighted score for that attribute. The project is then evaluated through a difference from a standard project attribute. If the total weighted score turns out to be positive, then the project should be selected; otherwise, the project should be rejected. This technique can be applied to risk analysis if risk events are compared to standard events and weighted against them.

Risk mitigation

Risk events diminish project objectives when harmful effects realize due to unforeseen circumstances. Risk management attempts at studying in detail, all aspects of project management, so that all controllable events have an action plan or a risk mitigation plan. A reactive approach or a feed back approach refers to risk mitigation actions initiated after risk events eventuate and can be seen as initiation of contingency plans. On the other hand, a pro-active approach or a feed forward approach refers to actions initiated based on chance of a risk event occurring, such as insurance (Kartam and Kartam, 2001; DeMaio *et al.*, 1994). A combination of these two approaches is applied to risk management to avoid risk, reduce the likelihood of risk, reduce the impact of risk, transfer risk, or to retain the risk (Risk Management Standard AS/NZS 4360, 1999).

Framework for risk management tools

A framework for risk management tools can be developed in relation to the risk management process in Figure 1 and is shown in Figure 4. Context establishment function is accomplished through techniques presented in the third section of this

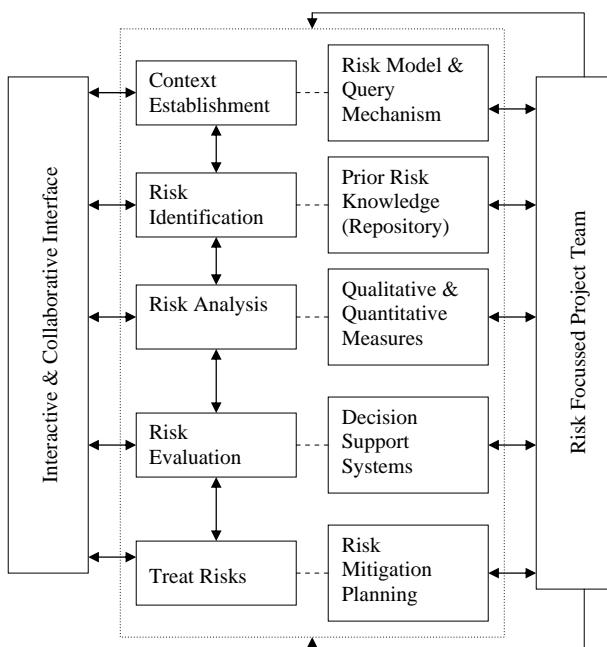


Figure 4.
Framework for risk
management tools

paper and the result is an establishment of a risk structure that will facilitate the subsequent functions in the risk management process. For example, in process focussed risk management context, the risk model could be a process model. Then, information features such as technical, financial, schedule, organisational, etc. aspects may be tagged to the process units to provide a relevance for risk assessment. A risk query mechanism may then be formulated through techniques presented fourth section and imposed on the process model through interactive or collaborative interfaces to collect quantitative and qualitative data as described in fifth section. The risk evaluation consists of decision support systems using techniques presented in sixth section of this paper. Risks worth investigating further due to their high chance of occurring or high potential impacts or leading to new opportunities are then pursued leading to being treated. This whole process of risk management is collaborative and requires incremental contributions from all participants within the organization and supplementing project management approach, which is more proactive.

Conclusions

Project risk management endeavours to supplement project management practices by investigating project structure, organizational environment, external environment, products, processes and procedures in detail. It further, supplements the existing knowledge with lessons learnt, best business practices, industry benchmarks and case studies such that risk mitigation plans are in place when risk events do eventuate. This prevents crisis situations and also provides future avenues for opportunities.

This paper presents techniques that are commonly used in project management and elsewhere, outlining their usefulness to project risk management, especially in CE projects. These techniques add to an understanding of risk management functions and build on team communication and collaboration, not necessarily completely dependent on a collaborative computer network or a computer application. All the techniques presented in this paper have their own characteristics and a specific realm of application. As such, a combination of these techniques is likely to fulfil most needs for risk management by a project team and evolve tools that are tailored for their needs but are generic in structure. Several software tools are also commercially available for risk management, but they address only a specific aspect of risk management using limited number of techniques presented in this paper. The framework for risk management tools presented in this paper provides an integrated approach to risk management in projects that can be used for development of risk management tools that suit specific domain but are generic in structure and may or may not be in the form of computer applications.

Current state of development in hardware and software technology enables integration of applications for the techniques presented in this paper. There are many risk management tools commercially available to support project management but tend to address either a limited scope of application or limited processes in risk management. Future developments in integrated and generic tools will lead to widespread use of risk management principles in project management, retain organisational knowledge and provide a competitive business edge.

References

Ahmed, A. *et al.* (2003a), "A conceptual framework for risk analysis in concurrent engineering", (R1.6 Paper No. 86), *Proceedings of the 17th International Conference on Production Research, 4-7 August, Blacksburg, Virginia, USA.*

Ahmed, A., Amornsawadwatana, S. and Kayis, B. (2003b), "Application of ARENA simulation to risk assessment in concurrent engineering projects", *Proceedings of the 9th International Conference on Manufacturing Excellence - ICME, 13-15 October, Melbourne, Australia.*

Amornsawadwatana, S. *et al.* (2002), "Risk mitigation investment in concurrent design process", *Proceedings of the International Conference on Manufacturing Automation - ICMA, Hong Kong, China*, Professional Engineering Publishing Ltd, Suffolk.

Ang, C.L. and Gay, R.K.L. (1993), "IDEF0 modelling for project risk assessment", *Computer in Industry*, Vol. 22, pp. 31-45.

Baccarini, D. and Archer, R. (2001), "The risk ranking of projects: a methodology", *International Journal of Project Management*, Vol. 19 No. 3, pp. 139-45.

Badiru, A.B. (1993), "Scheduling of concurrent manufacturing projects", in Parasaei, H.R. and Sullivan, W.G. (Eds), *Concurrent Engineering: Contemporary Issues and Modern Design Tools*, Chapman & Hall, London, pp. 93-109.

Badiru, A.B. (1996), *Project Management in Manufacturing and High Technology Operations*, Wiley, New York, NY.

Berny, J. and Townsend, P.R.F. (1993), "Macrosimulation of project risks – a practical way forward", *Risk Management*, Vol. 11 No. 4, pp. 201-8.

Birolini, A. (1993), "Design for reliability", in Kusiak, A. (Ed.), *Concurrent Engineering: Automation, Tools, and Techniques*, Wiley, New York, NY, pp. 307-47.

Boehm, B.W. and DeMarco, T. (1997), "Software risk management", *IEEE Software*, Vol. 14 No. 3, pp. 17-19.

Caillaud, E. *et al.*, (1999), "A framework for a knowledge-based system to risk management in concurrent engineering", *Concurrent Engineering: Research and Applications*, Vol. 7 No. 3, pp. 257-67.

Chapman, C.B. and Ward, S.C. (1997), *Project Risk Management: Processes, Techniques and Insights*, Wiley, Chichester.

Clarke, C.J. and Varma, S. (1999), "Strategic risk management: the new competitive edge", *Long Range Planning*, Vol. 32 No. 4, pp. 414-24.

Clemen, R.T. (1996), *Making Hard Decisions: An Introduction to Decision Analysis*, Druxbury Press, New York, NY.

Clemen, R.T. and Reilly, T. (2001), *Making Hard Decisions with Decision Tools*, Druxbury Thomson Learning, Toronto.

Colquhoun, G.J., Baines, R.W. and Crossley, R. (1993), "A state of the art review of IDEF0", *International Journal of Computer Integrated Manufacturing*, Vol. 6 No. 4, pp. 252-64.

Conroy, G. and Soltan, H. (1998), "ConSERV, a project specific risk management concept", *International Journal of Project Management*, Vol. 16 No. 6, pp. 353-66.

Cross, J. (2001) Lecture Notes for SESC9211: Risk Management, School of Safety Science, The University of New South Wales, Sydney.

Dawson, C.W. and Dawson, R.J. (1995), "Generalised activity-on-the-node networks for managing uncertainty in projects", *International Journal of Project Management*, Vol. 13 No. 6, pp. 353-62.

Dawson, R.J. and Dawson, C.W. (1994), "Clarification of node representation in generalised activity networks for practical project management", *International Journal of Project Management*, Vol. 12 No. 2, pp. 81-8.

Dawson, R.J. and Dawson, C.W. (1998), "Practical proposals for managing uncertainty and risk in project planning", *International Journal of Project Management*, Vol. 16 No. 5, pp. 299-310.

DeMaio, A., Verganti, R. and Corso, M. (1994), "A multi-project management framework for new product development", *European Journal of Operational Research*, Vol. 78 No. 2, pp. 178-91.

Dhillon, B.S. (1982), *Reliability Engineering in Systems Design and Operation*, Van Nostrand Reinhold Company, New York, NY.

Dickinson, M.W., Thornton, A.C. and Graves, S. (2001), "Technology portfolio management: optimizing interdependent projects over multiple time periods", *IEEE Transactions on Engineering Management*, Vol. 48 No. 4, pp. 518-27.

Duncan, W.R. (1996), *A Guide to the Project Management Body of Knowledge*, Project Management Institute, Newtown Square, PA, pp. 111-21.

Eppinger, S.D. *et al.* (2001), "DSM tutorial", available at: <http://web.mit.edu/dsm/Tutorial/tutorial.htm>

Henley, E.J. and Kumamoto, H. (1991), *Probabilistic Risk Assessment: Reliability Engineering, Design and Analysis*, IEEE Press, New York, NY.

Jaafari, A. (2001), "Management of risks, uncertainties and opportunities on projects: time for a fundamental shift", *International Journal of Project Management*, Vol. 19 No. 2, pp. 89-101.

Jo, H.H., Parasaei, H.R. and Sullivan, W.G. (1993), "Principles of concurrent engineering", in Parasaei, H.R. and Sullivan, W.G. (Eds), *Concurrent Engineering: Contemporary Issues and Modern Design Tools*, Chapman & Hall, London, pp. 3-23.

Kara, S., Kayis, B. and Kaebernick, H. (1999), "Modelling concurrent engineering project under uncertainty", *Concurrent Engineering: Research and Applications*, Vol. 7 No. 3, pp. 269-74.

Kartam, N.A. and Kartam, S.A. (2001), "Risk and its management in the Kuwaiti construction industry: contractors' perspective", *International Journal of Project Management*, Vol. 19 No. 6, pp. 325-35.

Kletz, T.A. (1985), "Eliminating potential process hazards", *Chemical Engineering*, Vol. 92 No. 4, pp. 48-68.

Kumamoto, H. and Henley, E.J. (1996), *Probabilistic Risk Assessment and Management for Engineers and Scientists*, IEEE Press, Piscataway, NJ.

Kusiak, A. and Zakarian, A. (1996), "Reliability evaluation of process models", *IEEE Transactions on Components, Packaging and Manufacturing Technology – Part A*, Vol. 19 No. 2, pp. 268-75.

Kusiak, A., Larson, T.N. and Wang, J. (1994), "Reengineering of design and manufacturing processes", *Computers & Industrial Engineering*, Vol. 26 No. 3, pp. 521-36.

Larson, N. and Kusiak, A. (1996a), "Managing design processes: a risk assessment approach", *IEEE Transactions on System, Man and Cybernetics – Part A: Systems and Humans*, Vol. 26 No. 6, pp. 749-59.

Larson, N. and Kusiak, A. (1996b), "System reliability methods for analysis of process models", *Journal of Integrated Computer-Aided Engineering*, Vol. 3 No. 4, pp. 279-90.

Lawley, H.G. (1974), "Operability studies and hazard analysis", *Chemical Engineering Progress*, Vol. 70 No. 4, pp. 45-56.

Malmstrom, J., Pikosz, P. and Malmquist, J. (1999), "Complementary roles of IDEF0 and DSM for the modelling information management process", *Concurrent Engineering: Research and Applications*, Vol. 7 No. 2, pp. 95-103.

Mayer, R.J. et al. (1995), "Information integration for concurrent engineering (IICE)", IDEF3 Process Capture Method Report, Human Resources Directorate Logistics Research Division, Armstrong Laboratory, Wright-Patterson AFB, OH.

Patterson, F.D. and Neailey, K. (2002), "A risk register database system to aid the management of project risk", *International Journal of Project Management*, Vol. 20 No. 5, pp. 365-74.

Perry, J.G. (1986), "Risk management – an approach for project managers", *Project Management*, Vol. 4 No. 4, pp. 211-6.

Perry, J.G. and Haynes, R.W. (1985), "Risk and its management in construction projects", *Proceedings of Institution of Civil Engineers*, pp. 499-521.

Pyra, J. and Trask, J. (2002), "Risk management post analysis: gauging the success of a simple strategy in a complex project", *Project Management Journal*, Vol. 33 No. 2, pp. 41-8.

Raftery, J. (1994), *Risk Analysis in Project Management*, Chapman & Hall, London.

Remenyi, D. and Heafield, A. (1996), "Business process re-engineering: some aspects of how to evaluate and manage the risk exposure", *International Journal of Project Management*, Vol. 14 No. 6, pp. 349-57.

Risk Management Standard AS/NZS 4360 (1999) Risk Management Standard AS/NZS 4360, Standards Association of Australia, Sydney.

Roach, J.R. and Lees, F.P. (1981), "Some features of and activities in hazard and operability (Hazop) studies", *The Chemical Engineer*, October, pp. 456-62.

Royer, P.S. (2000), "Risk management: the undiscovered dimension of project management", *Project Management Journal*, Vol. 31 No. 1, pp. 6-13.

Russell, R.S. and Taylor, B.W. III (2000), *Operations Management*, Prentice-Hall Inc., Upper Saddle River, NJ.

Salamone, T.A. (1995), *What Every Engineer Should Know About Concurrent Engineering*, Marcel Dekker, New York, NY.

Sarkis, J. and Lin, L. (1994), "An IDEF0 functional planning model for the strategic implementation of CIM systems", *International Journal of Computer Integrated Manufacturing*, Vol. 7 No. 2, pp. 100-15.

Steward, D.V. (1981), *Systems Analysis and Management: Structure, Strategy and Design*, Petrocelli Books Inc., New York, NY.

Stewart, M.G. and Melchers, R.E. (1997), *Probabilistic Risk Assessment of Engineering Systems*, Chapman & Hall, London.

Taha, H.A. (1997), *Operations Research: An Introduction*, Prentice-Hall, Upper Saddle River, NJ.

Tavares, L.V. (2002), "A review of the contribution of operational research to project management", *European Journal of Operational Research*, Vol. 136 No. 1, pp. 1-18.

Ward, S.C. (1999), "Assessing and managing important risks", *International Journal of Project Management*, Vol. 17 No. 6, pp. 331-6.

Webb, A. (1994), *Managing Innovative Projects*, Chapman & Hall, London.

Wiest, J.D. (1981), "Precedence diagramming methods: some unusual characteristics and their implications for project managers", *Journal of Operations Management*, Vol. 1 No. 3, pp. 121-30.

Williams, T. (1995), "A classified bibliography of recent research relating to risk management", *European Journal of Operational Research*, Vol. 85 No. 1, pp. 18-38.

Further reading

Klein, J.H. and Cork, R.B. (1998), "An approach to technical risk assessment", *International Journal of Project Management*, Vol. 16 No. 6, pp. 345-51.

Corresponding author

Ammar Ahmed can be contacted at: ammar@unsw.edu.au

This article has been cited by:

1. Mehdi Tavakolan, Amir Mohammadi. 2018. Risk management workshop application: a case study of Ahwaz Urban Railway project. *International Journal of Construction Management* 18:3, 260-274. [\[Crossref\]](#)
2. Anjali Shishodia, Vijaya Dixit, Priyanka Verma. Project risk analysis based on project characteristics. *Benchmarking: An International Journal* 0:ja, 00-00. [\[Abstract\]](#) [\[PDF\]](#)
3. Raof Ahmad Khan, Ankush Anand, Mohd Farooq Wani. 2018. A holistic framework for environment conscious based product risk modeling and assessment using multi criteria decision making. *Journal of Cleaner Production* 174, 954-965. [\[Crossref\]](#)
4. Badrulhisham Baharuddin, Maryati Mohd Yusof. Risk management practices for information system projects in the public sector 1-5. [\[Crossref\]](#)
5. Chao Fang, Franck Marle, Min Xie. 2017. Applying Importance Measures to Risk Analysis in Engineering Project Using a Risk Network Model. *IEEE Systems Journal* 11:3, 1548-1556. [\[Crossref\]](#)
6. Liaqat A. Shah, Alain Etienne, Ali Siadat, François Vernadat. 2017. Process-oriented risk assessment methodology for manufacturing process evaluation. *International Journal of Production Research* 55:15, 4516-4529. [\[Crossref\]](#)
7. Yang Zou, Arto Kiviniemi, Stephen W. Jones. 2017. A review of risk management through BIM and BIM-related technologies. *Safety Science* 97, 88-98. [\[Crossref\]](#)
8. Z L Guo, W B Zhang, L H Ma. 2017. The prefabricated building risk decision research of DM technology on the basis of Rough Set. *IOP Conference Series: Earth and Environmental Science* 81, 012143. [\[Crossref\]](#)
9. Edzreena Edza Odzaly, Des Greer, Darryl Stewart. 2017. Agile risk management using software agents. *Journal of Ambient Intelligence and Humanized Computing* 14. . [\[Crossref\]](#)
10. Mohamed M. G. Elbarkouky, Aminah Robinson Fayek, Nasir B. Siraj, Naimeh Sadeghi. 2016. Fuzzy Arithmetic Risk Analysis Approach to Determine Construction Project Contingency. *Journal of Construction Engineering and Management* 142:12, 04016070. [\[Crossref\]](#)
11. Li Zhou, Jiaping Xie, Xiaoyu Gu, Yong Lin, Petros Ieromonachou, Xiaole Zhang. 2016. Forecasting return of used products for remanufacturing using Graphical Evaluation and Review Technique (GERT). *International Journal of Production Economics* 181, 315-324. [\[Crossref\]](#)
12. Maria Garbuzova-Schlifter, Reinhard Madlener. 2016. AHP-based risk analysis of energy performance contracting projects in Russia. *Energy Policy* 97, 559-581. [\[Crossref\]](#)
13. Jamal Ouenniche, Aristotelis Boukouras, Mohammad Rajabi. 2016. An Ordinal Game Theory Approach to the Analysis and Selection of Partners in Public-Private Partnership Projects. *Journal of Optimization Theory and Applications* 169:1, 314-343. [\[Crossref\]](#)
14. Nick Leithold, Tino Woschke, Heiko Haase, Jan Kratzer. 2016. Optimising NPD in SMEs: a best practice approach. *Benchmarking: An International Journal* 23:1, 262-284. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
15. Abroon Qazi, John Quigley, Alex Dickson, Konstantinos Kirytopoulos. Modelling project complexity driven risk paths in new product development 938-945. [\[Crossref\]](#)
16. Adwoa Boadua Yirenkyi-Fianko, Nicholas Chileshe. 2015. An analysis of risk management in practice: the case of Ghana's construction industry. *Journal of Engineering, Design and Technology* 13:2, 240-259. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)

17. Othman Mohamed, Saipol Bari Abd-Karim, Nur Hazwani Roslan, Mohd Suhaimi Mohd Danuri, Norhanim Zakaria. 2015. Risk management: Looming the modus operandi among construction contractors in Malaysia. *International Journal of Construction Management* 15:1, 82-93. [\[Crossref\]](#)
18. Rao Rao, Xingping Zhang, Zhiping Shi, Kaiyan Luo, Zhongfu Tan, Yifan Feng. 2014. A Systematical Framework of Schedule Risk Management for Power Grid Engineering Projects' Sustainable Development. *Sustainability* 6:10, 6872-6901. [\[Crossref\]](#)
19. Shuling Kan, Jing Lu, Jianping Liu, Junlin Wang, Yi Zhao. 2014. A quality by design (QbD) case study on enteric-coated pellets: Screening of critical variables and establishment of design space at laboratory scale. *Asian Journal of Pharmaceutical Sciences* 9:5, 268-278. [\[Crossref\]](#)
20. Daniel W.M. Chan, Joseph H.L. Chan, Tony Ma. 2014. Developing a fuzzy risk assessment model for guaranteed maximum price and target cost contracts in South Australia. *Facilities* 32:11/12, 624-646. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
21. She-I Chang, Shi-Ming Huang, Jinsheng Roan, I-Cheng Chang, Pu-Jui Liu. 2014. Developing a risk management assessment framework for public administration in Taiwan. *Risk Management* 16:3, 164-194. [\[Crossref\]](#)
22. Vinayak Kalluri, Rambabu Kodali. 2014. Analysis of new product development research: 1998-2009. *Benchmarking: An International Journal* 21:4, 527-618. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
23. Nicholas Chileshe, Geraldine John Kikwasi. 2014. Critical success factors for implementation of risk assessment and management practices within the Tanzanian construction industry. *Engineering, Construction and Architectural Management* 21:3, 291-319. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
24. Pejman Rezakhani, Won-Suk Jang, Sangwook Lee, Dong-Eun Lee. 2014. Project risk assessment model combining the fuzzy weighted average principle with a similarity measure. *KSCE Journal of Civil Engineering* 18:2, 521-530. [\[Crossref\]](#)
25. John Bowers, Alireza Khorakian. 2014. Integrating risk management in the innovation project. *European Journal of Innovation Management* 17:1, 25-40. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
26. B.A.K.S. Perera, Raufdeen Rameezdeen, Nicholas Chileshe, M. Reza Hosseini. 2014. Enhancing the effectiveness of risk management practices in Sri Lankan road construction projects: A Delphi approach. *International Journal of Construction Management* 14:1, 1-14. [\[Crossref\]](#)
27. Takashi Shimizu, Youngwon Park, SukBong Choi. 2014. Project managers and risk management: A comparative study between Japanese and Korean firms. *International Journal of Production Economics* 147, 437-447. [\[Crossref\]](#)
28. Maria del Mar Casanovas, Jaume Armengou, Gonzalo Ramos. 2014. Occupational Risk Index for Assessment of Risk in Construction Work by Activity. *Journal of Construction Engineering and Management* 140:1, 04013035. [\[Crossref\]](#)
29. Chen Bao-Chun, Chen Jian-Guo. 2013. Fuzzy AHP-based Safety Risk Assessment Methodology for Tower Crane. *Journal of Applied Sciences* 13:13, 2598-2601. [\[Crossref\]](#)
30. Rolandas Drejeris, Juozas Bivainis, Živilė Tunčikienė, Eglė Drejerienė. 2013. Determining the purposefulness of new services on the grounds of the results of quantitative analysis. *Journal of Business Economics and Management* 14:4, 791-805. [\[Crossref\]](#)
31. Chao Fang, Franck Marle, Min Xie, Enrico Zio. 2013. An Integrated Framework for Risk Response Planning Under Resource Constraints in Large Engineering Projects. *IEEE Transactions on Engineering Management* 60:3, 627-639. [\[Crossref\]](#)

32. Jialin Liu, Quanxi Li, Yuhan Wang. 2013. Risk analysis in ultra deep scientific drilling project — A fuzzy synthetic evaluation approach. *International Journal of Project Management* 31:3, 449–458. [\[Crossref\]](#)
33. Hamzah Abdul-Rahman, Chen Wang, Yee Lin Lee. 2013. DESIGN AND PILOT RUN OF FUZZY SYNTHETIC MODEL (FSM) FOR RISK EVALUATION IN CIVIL ENGINEERING. *Journal of Civil Engineering and Management* 19:2, 217–238. [\[Crossref\]](#)
34. L.A. Shah, A. Etienne, A. Siadat, F.B. Vernadat. 2013. A Process-Oriented Risk Assessment Methodology for Manufacturing Processes. *IFAC Proceedings Volumes* 46:9, 216–221. [\[Crossref\]](#)
35. Davide Aloini, Riccardo Dulmin, Valeria Mininno, Simone Ponticelli. 2012. Supply chain management: a review of implementation risks in the construction industry. *Business Process Management Journal* 18:5, 735–761. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
36. Paul Hong, Soon W. Hong, James Jungbae Roh, Kihyun Park. 2012. Evolving benchmarking practices: a review for research perspectives. *Benchmarking: An International Journal* 19:4/5, 444–462. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
37. Takashi Shimizu, Young Won Park, Paul Hong. 2012. Project managers for risk management: case for Japan. *Benchmarking: An International Journal* 19:4/5, 532–547. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
38. Davide Aloini, Riccardo Dulmin, Valeria Mininno. 2012. Risk assessment in ERP projects. *Information Systems* 37:3, 183–199. [\[Crossref\]](#)
39. ANA NIETO-MOROTE, FRANCISCO RUZ-VILA. 2011. A FUZZY AHP MULTI-CRITERIA DECISION-MAKING APPROACH APPLIED TO COMBINED COOLING, HEATING, AND POWER PRODUCTION SYSTEMS. *International Journal of Information Technology & Decision Making* 10:03, 497–517. [\[Crossref\]](#)
40. Chiara Verbano, Karen Venturini. 2011. Development paths of risk management: approaches, methods and fields of application. *Journal of Risk Research* 14:5, 519–550. [\[Crossref\]](#)
41. Nerija Banaitienė, Audrius Banaitis, Artūras Norkus. 2011. Risk management in projects: peculiarities of Lithuanian construction companies. *International Journal of Strategic Property Management* 15:1, 60–73. [\[Crossref\]](#)
42. Jan Terje Karlsen. 2011. Supportive culture for efficient project uncertainty management. *International Journal of Managing Projects in Business* 4:2, 240–256. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
43. A. Nieto-Morote, F. Ruz-Vila. 2011. A fuzzy approach to construction project risk assessment. *International Journal of Project Management* 29:2, 220–231. [\[Crossref\]](#)
44. Ofer Zwikel, Mark Ahn. 2011. The Effectiveness of Risk Management: An Analysis of Project Risk Planning Across Industries and Countries. *Risk Analysis* 31:1, 25–37. [\[Crossref\]](#)
45. Grant Kululanga, Witness Kuotcha. 2010. Measuring project risk management process for construction contractors with statement indicators linked to numerical scores. *Engineering, Construction and Architectural Management* 17:4, 336–351. [\[Abstract\]](#) [\[Full Text\]](#) [\[PDF\]](#)
46. Chen-Ling Fang, Wen-Chung Liu. Analysis of relationship between operational risk and financial efficiency among different location types in farmers’ association 1348–1353. [\[Crossref\]](#)
47. Samaneh Barati, Shahriyar Mohammadi. Enhancing Risk Management with an efficient risk identification approach 1181–1186. [\[Crossref\]](#)
48. . Risk Sharing in a Partnership 115–152. [\[Crossref\]](#)
49. . Risk in a Partnership 153–190. [\[Crossref\]](#)
50. . Risk Management Framework 229–270. [\[Crossref\]](#)

51.. Establishing Boundaries for Risk Taking 191-228. [[Crossref](#)]